


Luna SHP 42x92




BATTENS

Luna SHP 42x92 is a premium Thermowood batten for facades, solar shades, interiors and other decorative surfaces and is beautiful and durable.

PRODUCT DETAILS

Size	42x92
Class	LunaThermo-D
Surface	Planed
Species	Pine, <i>Pinus sylvestris</i>
Lengths	3,0 / 3,6 – 5,4 m (availability varies) Length package in 30 cm modules
Utility data	Coverage width 102 mm, (10mm gap) 9,8 rm/m ² Weight average ~1,7 kg/m ~16,6 kg/m ²
Packaging	Package size 156 pcs (half package) Package covered by Lunawood plastic hood on 5 sides
Article	42x92 SHP Thermo-D RWA
Product specifications	Tolerances, quality and installation based on Lunawood general rules and instructions.
	Nominal size: 50x100
	Also available fire protected

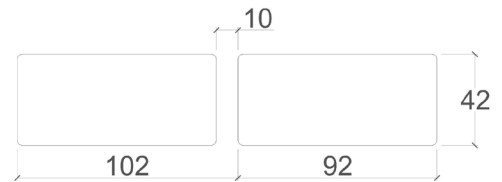

LUNAWOOD TECHNICAL DATASHEET

Essential Characteristics	Pine (<i>Pinus sylvestris</i>)	Harmonized European standard
Density	420 kg / m ³	SFS-EN 317
Reaction to fire class	D - s2, d0	SFS-EN 13502-1 + A1
Screw traction resistance	19,45 ± 1,47 N/mm ²	SFS-EN 13446
Thermal conductivity	0,09 W/(m·K)	EN ISO 13787 + EN 12667
Durability class	Class 2 Thermo-D	EN 350-1
Use class	Class 3 Thermo-D	EN 335
Stability, shrinking and swelling	Tangential fibre direction 4 % Radial fibre direction 2 %	SFS-EN 317
Equilibrium Moisture	6,4 %	EN 13183-1
Brinell Hardness	1,4 N/mm ²	SFS-EN 1534
Janka	1700 N	ASTM D143-94
TVOC	Thermo-D 0,077 mg/m ³ h	ISO 16000-9:2006 SFS-EN 16516:2017
CO2 emissions (EPD)	117 kg CO2 eq/m ³	Lunawood EPD

Use QR code by phone or click it to open to Your browser



Product documents



Design tools

Version: 11/2023